


JLTXplore

6. Disassembly / Maintenance



Written By: JLTX

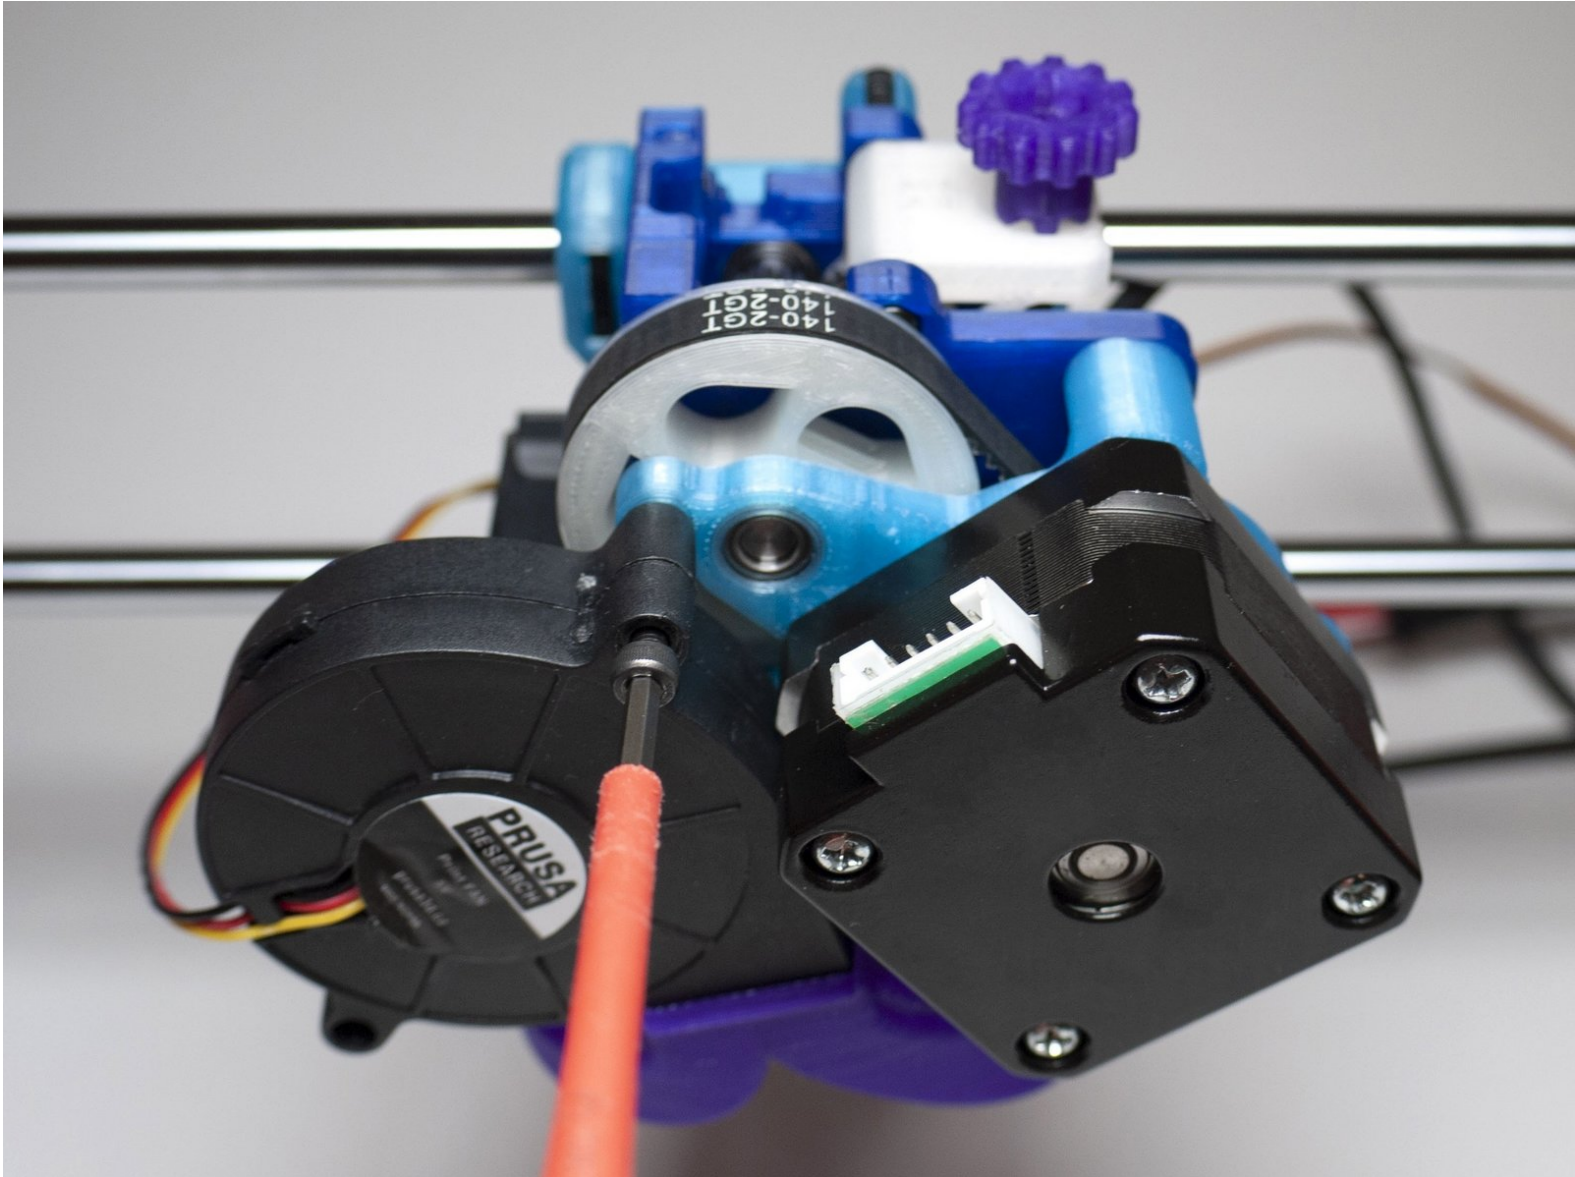

INTRODUCTION

Working on Skelestruder is much easier than the stock extruder due to its highly modular build.

Step 1 — Changing a nozzle

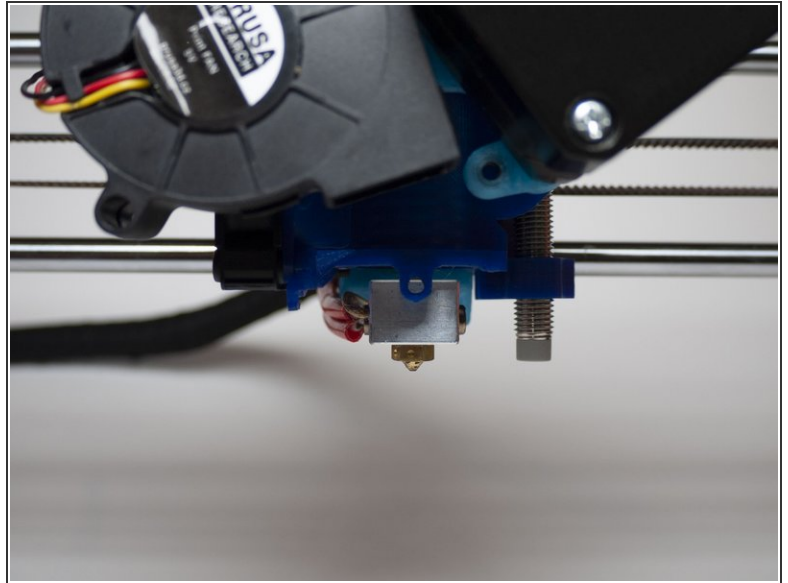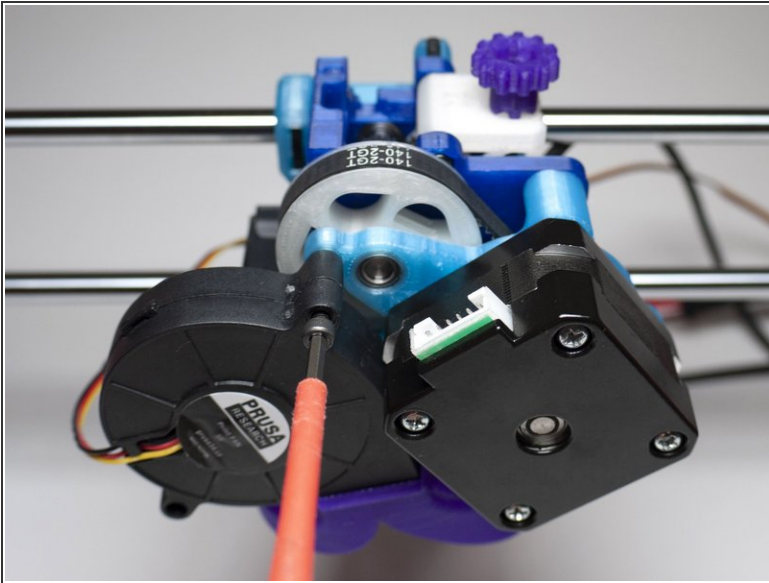

- Simply remove Omega cooler and you have great access.
- ① Tip: loosen fan screw to help remove Omega.

Step 2 — Removing heatsink



- coming...

Step 3 — Removing square nuts



- Note that all the embedded sq nuts have an access hole somewhere nearby to enable pushing out using a small hex wrench or similar fine point.